


Rental curved led display (500x500cabinet)



Features:

- Angle adjustable -10 degree to +10 degree, Inside curved or outside curved both available;
- With magnets can for front service ;
- There are both curved and straight locks in The cabinets,when assemble cabinets together, There isn't space ;
- Seamless connecting tech, high resolution, Presenting the most real pictures;
- High contrast,ideal gray scale,presenting the Clear and bright pictures;
- The appearance is very elegant, quality is Very stable;
- The most effective solution for outdoor HD Billboard;
- Light weight:9~12 kg/cabinet .

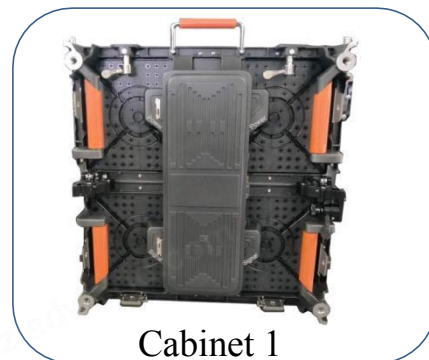


Cabinet 1




Cabinet 2



Arc LED display:

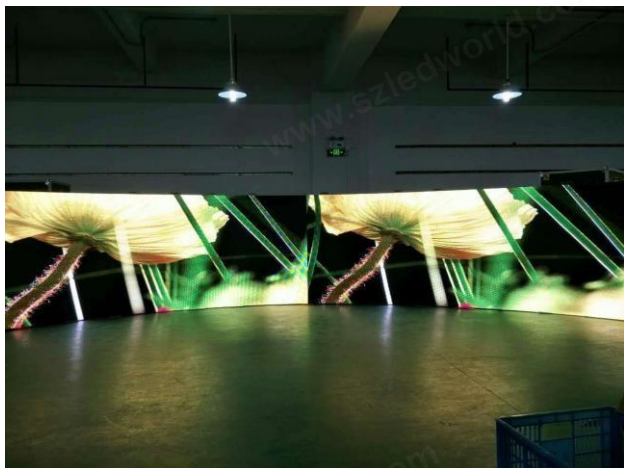


Inner arc LED display

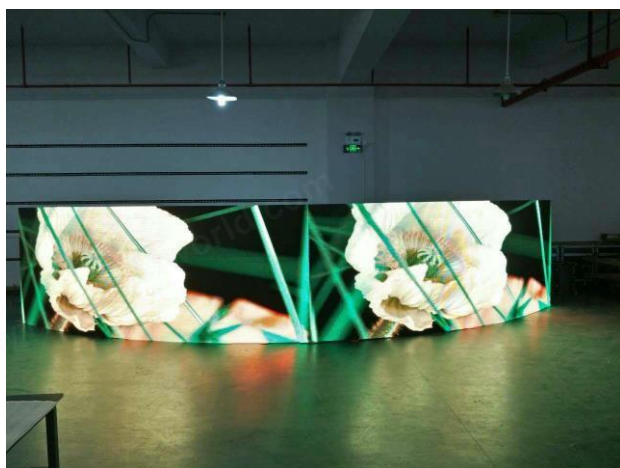

Outer arc LED display

Detail of locks:

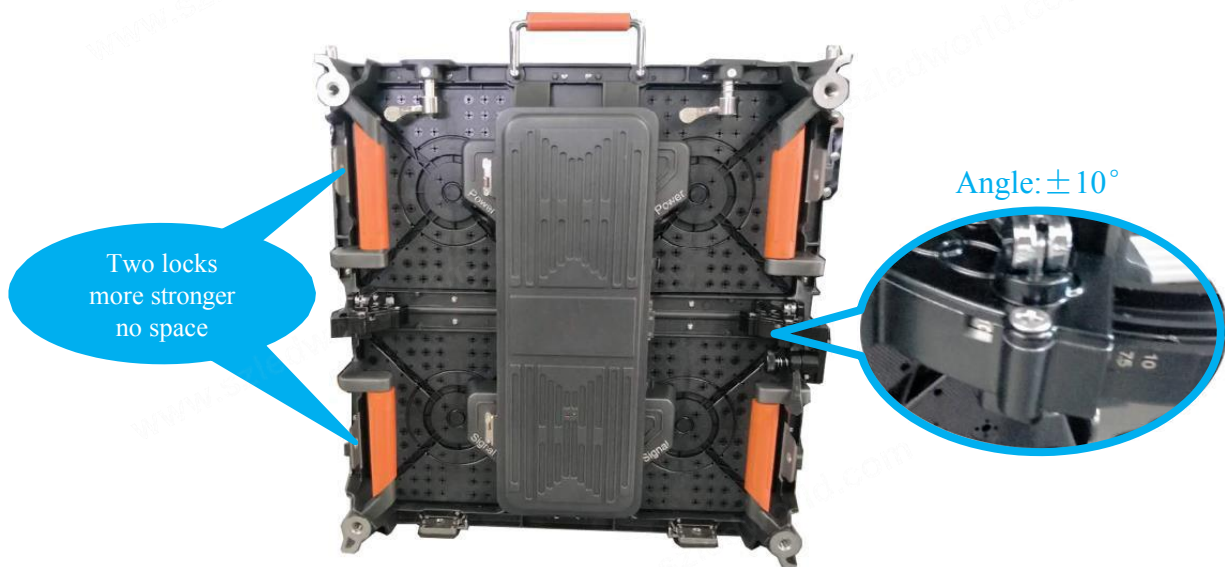

Application:

Stage Performance Conference Celebration banquet exhibition

Technical Specifications:

Parameter	P3.91 indoor	P3.91 outdoor	P4.81 indoor	P4.81 outdoor	P5.95 indoor	P6.25 indoor	P6.25 outdoor
Pixel pitch	3.91mm	3.91mm	4.81mm	4.81mm	5.95mm	6.25mm	6.25mm
LED Type	SMD2121 black	SMD1921 white	SMD2121 Black	SMD2525 white	SMD3528 White	SMD3528 White	SMD3535 White
Scan Style	1/16	1/16	1/13	1/13	1/11	1/10	1/10
Pixel Density	65,536	65,536	43,264	43,264	28,224	25,600	25,600
Module size(mm)	250W * 250H						
Cabinet Size(mm)	500 W*500 H	500 W*500 H	500 W*500 H	500 W*500 H	500 W*500 H	500 W*500 H	500 W*500 H
Pixels/Cabinet	128x128	128x128	104x104	104x104	84x84	80x80	80x80
Refresh rate	>1920Hz	>1920Hz	>1920Hz	>1920Hz	>1920Hz	>1920Hz	>1920Hz
Brightness	>1300Nits	>4500Nits	>1300Nits	>4100Nits	>2000Nits	>1600Nits	>4100Nits
Max Power/ panel	400W	300W	360W	360W	360W	360W	360W
Weight per cabinet	about 6.5Kg	about 7.5Kg	about 6.5Kg	about 7.5Kg	About 6.5Kg	about 6.5Kg	about 7.5Kg
Best viewing distance	≥4m	≥4m	≥4.8m	≥4.8m	≥5.9m	≥6.2m	≥6.2m
Cabinet material	Die-casting aluminum						
Operating temperature	-30°C---- +60°C						
Operating humidity	10%---%95RH						
Operating system	Windows XP / Windows 7 /Windows8 /Windows8.1/Windows 10						
Notes:	Specifications are for reference only. Please contact our salesperson for details. All rights are Reserved to Led World.						